

ONE
FLOOR

EUROPE



THE **EVERYDAY** FLOORING

HOME 30 CONCEPT



HOME 30 CONCEPT

Make no compromise on design and quality, your home deserves the best (floor)!

HOME 30 is the ideal all-in-one flooring solution for your new interior decoration.

With 24 exclusive and authentic natural colors, **HOME 30** brings the premium look your home deserves.

All 24 designs are available in 3 different product structures* to meet all functional expectations (*dry back, traditional click and rigid click acoustic LVT).

3 colorways are also available in a herringbone pattern to bring a fashionable atmosphere into your home.

HOME 30 is simply the best 3-in-1 LVT concept of the market!



Products benefits

Best value for money (ECO30).

3 product structures suitable for residential and light commercial uses.

Resistant to scuff, scratches and stains. PUR Ecoprotec™ surface treatment for an easy cleaning.

Direct installation over most existing hard surface floors. Little or no subfloor preparation required (SOLIDE CLICK 30).



Suitable for underfloor heating.

Integrated acoustic pad for high sound reduction (21 dB - SOLIDE CLICK 30).

100% waterproof.

Quick and easy to install thanks to the fold-down vertical click system (ECOCLICK30 & SOLIDE CLICK 30).

Very low VOC, phthalate free and 100% recyclable.

Can be removed without leaving any residue (ECOCLICK30 & SOLIDE CLICK 30).



HOME 30 CONCEPT

HOME 30 is the ideal all-in-one flooring solution for your new interior decoration.

With 24 exclusive and authentic natural colors, HOME 30 brings the premium look your home deserves.



Noble Oak Greige

OFR-030-004N | 177,8 x 1219,2 mm
OFD-030-062 | 185 x 1219,2 mm
OFC-030-062 | 177,8 x 1219,2 mm



Royal Oak Natural

OFR-030-005N | 177,8 x 1219,2 mm
OFD-030-063 | 185 x 1219,2 mm
OFC-030-063 | 177,8 x 1219,2 mm



Authentic Oak Natural

OFR-030-006N | 177,8 x 1219,2 mm
OFD-030-064 | 185 x 1219,2 mm
OFC-030-064 | 177,8 x 1219,2 mm




Pure Oak Grey

OFR-030-008N | 177,8 x 1219,2 mm
OFD-030-065 | 185 x 1219,2 mm
OFC-030-065 | 177,8 x 1219,2 mm



Prestige Oak Natural

OFR-030-009N | 177,8 x 1219,2 mm
OFD-030-066 | 185 x 1219,2 mm
OFC-030-066 | 177,8 x 1219,2 mm

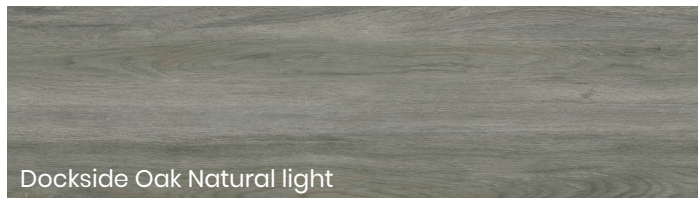


Dockside Oak Natural light

OFR-030-011N | 177,8 x 1219,2 mm
OFD-030-068 | 185 x 1219,2 mm
OFC-030-068 | 177,8 x 1219,2 mm



Sea Oak white

OFR-030-012N | 177,8 x 1219,2 mm
OFD-030-069 | 185 x 1219,2 mm
OFC-030-069 | 177,8 x 1219,2 mm

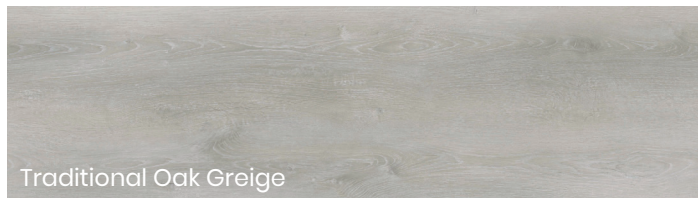


Traditional Oak Greige

OFR-030-013N | 177,8 x 1219,2 mm
OFD-030-070 | 185 x 1219,2 mm
OFC-030-070 | 177,8 x 1219,2 mm



Traditional Oak Natural light

OFR-030-014N | 177,8 x 1219,2 mm
OFD-030-071 | 185 x 1219,2 mm
OFC-030-071 | 177,8 x 1219,2 mm

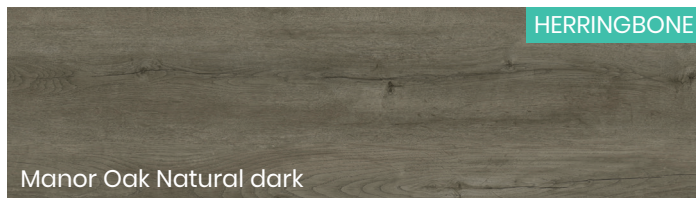

HERRINGBONE

Manor Oak Natural dark

OFR-030-010N | 177,8 x 1219,2 mm
OFD-030-067 | 185 x 1219,2 mm
OFC-030-067 | 177,8 x 1219,2 mm
HB OFD-030-167 | 122 x 610 mm
HB OFR-030-167 | 122 x 610 mm



Worn Oak Greige

OFR-030-015N | 177,8 x 1219,2 mm
OFD-030-072 | 185 x 1219,2 mm
OFC-030-072 | 177,8 x 1219,2 mm



Painted Wood Natural

OFR-030-016N | 177,8 x 1219,2 mm
OFD-030-073 | 185 x 1219,2 mm
OFC-030-073 | 177,8 x 1219,2 mm



HERRINGBONE

Sawcut Oak Natural

OFR-030-017N | 177,8 x 1219,2 mm
OFD-030-074 | 185 x 1219,2 mm
OFC-030-074 | 177,8 x 1219,2 mm
HB OFR-030-174 | 122 x 610 mm
HB OFD-030-174 | 122 x 610 mm



HERRINGBONE

Soft Oak Greige

OFR-030-020N | 177,8 x 1219,2 mm
OFD-030-077 | 185 x 1219,2 mm
OFC-030-077 | 177,8 x 1219,2 mm
HB OFR-030-177 | 122 x 610 mm
HB OFD-030-177 | 122 x 610 mm



Sawcut Oak Dark

OFR-030-018N | 177,8 x 1219,2 mm
OFD-030-075 | 185 x 1219,2 mm
OFC-030-075 | 177,8 x 1219,2 mm



Soft Oak Natural

OFR-030-019N | 177,8 x 1219,2 mm
OFD-030-076 | 185 x 1219,2 mm
OFC-030-076 | 177,8 x 1219,2 mm



French Oak Natural

OFR-030-021N | 177,8 x 1219,2 mm
OFD-030-078 | 185 x 1219,2 mm
OFC-030-078 | 177,8 x 1219,2 mm




German Oak Natural

OFR-030-022N | 177,8 x 1219,2 mm
OFD-030-079 | 185 x 1219,2 mm
OFC-030-079 | 177,8 x 1219,2 mm

REFERENCES :

OFR - SOLIDE CLICK 30
OFD - ECO30
OFC - ECOCLICK30

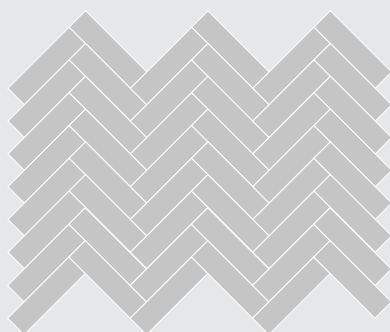

HERRINGBONES PATTERN

HERRINGBONES


The aesthetics and timeless elegance of a herringbone floor is unique.

Herringbone patterns tell the story of castles, classical mansion houses and museums. They can also play a magnificent role in modern and classic homes.



Origin Concrete Natural

OFR-030-001N | 457,2 x 914,4 mm
OFD-030-060 | 457,2 x 914,4 mm
OFC-030-060 | 466 x 936 mm

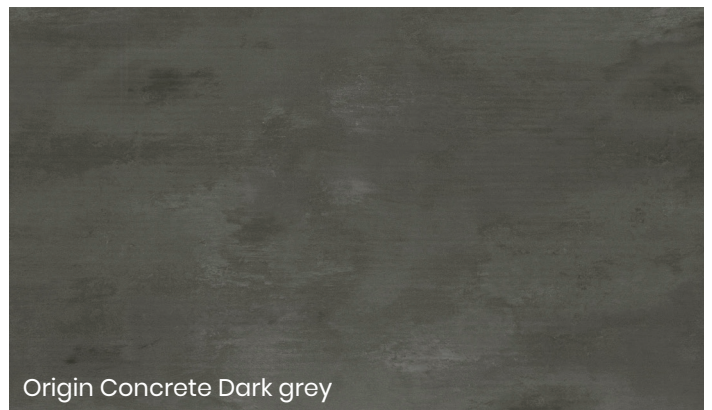

Origin Concrete Dark grey

OFR-030-002N | 457,2 x 914,4 mm
OFD-030-061 | 457,2 x 914,4 mm
OFC-030-061 | 466 x 936 mm



Oxyde Rust

OFR-030-023N | 457,2 x 914,4 mm
OFD-030-080 | 457,2 x 914,4 mm
OFC-030-080 | 466 x 936 mm



Oxyde Grey

OFR-030-024N | 457,2 x 914,4 mm
OFD-030-081 | 457,2 x 914,4 mm
OFC-030-081 | 466 x 936 mm



Waystone Pearl

OFR-030-025N | 304,8 x 609,6 mm
OFD-030-082 | 304,8 x 609,6 mm
OFC-030-082 | 304,8 x 609,6 mm



Waystone Grey

OFR-030-026N | 304,8 x 609,6 mm
OFD-030-083 | 304,8 x 609,6 mm
OFC-030-083 | 304,8 x 609,6 mm



PRODUCT SPECIFICATIONS	STANDARD	SOLIDE CLICK 30 // SOLIDE CLICK 30 HB		ECO 30 // ECO 30 HB		ECOCLICK 30	
Product standard	-	EN ISO 10582		EN ISO 10582		EN ISO 10582	
Product standard	-	Heterogeneous resilient floorcovering					
Total thickness	EN ISO 24346	4,5 mm		2,0 mm		4,0 mm	
Wear layer thickness	EN ISO 24340	0,30 mm		0,30 mm		0,30 mm	
Classification	EN ISO 10874	Domestic: 23 / Commercial: 31		Domestic: 23 / Commercial: 31		Domestic: 23 / Commercial: 31	
Total weight	EN ISO 23997	6.450 g/m ² - 7.100 g/m ² (HB)		3.605 g/m ² - 3.600 g/m ² (HB)		7.630 g/m ²	
Wear layer binder content	EN ISO 10582	Type I		Type I		Type I	
Abrasion group	EN 660-2	Group T: ≤ 2,00 mm ³		Group T: ≤ 2,00 mm ³		Group T: ≤ 2,00 mm ³	
Dimensions	EN ISO 24342	Planks: 177,8 x 1219,2 mm 12 planks/box = 2,60m ² 40 boxes/pallet = 104,05m ²	Planks (HB): 122 x 610 mm 20 planks/box = 1,49m ² 112 boxes/pallet = 166,88m ²	Planks: 185 x 1219,2 mm 21 planks/box = 4,74m ² 60 boxes/pallet = 284,4m ²	Planks (HB): 122 x 610 mm 36 planks/box = 2,68m ² 126 boxes/pallet = 337,68m ²	Planks : 177,8 x 1219,2 mm 10 planks/box = 2,17m ² 60 boxes/pallet = 130,2m ²	-
		Tiles: 457,2 x 914,4 mm 6 tiles/box = 2,51m ² 52 boxes/pallet = 130,44m ²	Tiles: 304,8 x 609,6 mm 12 tiles/box = 2,23m ² 60 boxes/pallet = 133,80m ²	Tiles: 457,2 x 914,4 mm 12 tiles/box = 5,02m ² 58 boxes/pallet = 291,16m ²	Tiles: 304,8 x 609,6 mm 24 tiles/box = 4,46m ² 68 boxes/pallet = 294,36m ²	Tiles: 466 x 936 mm 6 tiles/box = 2,62m ² 50 boxes/pallet = 131m ²	Tiles: 304,8 x 609,6 mm 12 tiles/box = 2,23m ² 60 boxes/pallet = 133,8m ²
Surface treatment	-	PUR Ecoprotec™		PUR Ecoprotec™		PUR Ecoprotec™	
Locking system	-	I4F		Dry back		Unipush	
Bevelled edges	-	Yes (Micro bevel)		Yes (Micro bevel)		Yes (Micro bevel)	

PRODUCT PERFORMANCES	STANDARD	SOLIDE CLICK 30 // SOLIDE CLICK 30 HB		ECO 30 // ECO 30 HB		ECOCLICK 30	
Dimensional stability	EN ISO 23999	≤ 0,06 %		≤ 0,10 %		≤ 0,10 %	
Castor chair	ISO 4918	No damage (Type W)		No damage (Type W)		No damage (Type W)	
Furniture leg	EN ISO 16581	No damage		No damage		No damage	
Squareness & straightness	EN ISO 24342	≤ 0,25 mm		≤ 0,25 mm		≤ 0,25 mm	
Residual indentation	EN ISO 24343-1	≤ 0,10 mm		≤ 0,10 mm		≤ 0,10 mm	
Impact sound reduction	EN ISO 717-2	ΔLw = 21 dB		ΔLw = 6 dB		ΔLw = 9 dB	
Light fastness	EN ISO 105-B02	≥ 6		≥ 6		≥ 6	
Slip resistance	DIN 51130 EN 13893	R10 DS		R10 DS		R10 DS	
Resistance to chemicals	EN ISO 26987	Not affected (0)		Not affected (0)		Not affected (0)	
Thermal resistance	EN ISO 10456	0,04 m ² K/W		0,02 m ² K/W		0,04 m ² K/W	
Curl after exposure to heat	EN ISO 23999	≤ 2 mm		≤ 2 mm		≤ 2 mm	
Fire resistance	EN 13501-1	Bfl-s1		Bfl-s1		Bfl-s1	
Electrical properties	EN 1815	≤ 2kV		≤ 2kV		≤ 2kV	
Resistance against staining	EN 26987	Passed		Passed		Passed	
Underfloor heating suitability	EN 12524	Suitable - max. 27°C		Suitable - max. 27°C		Suitable - max. 27°C	

ENVIRONMENT	STANDARD	SOLIDE CLICK 30 // SOLIDE CLICK 30 HB		ECO 30 // ECO 30 HB		ECOCLICK 30	
TVOC after 28 days (AgBB test) - Indoor air quality	ISO 16000-9	≤ 100µg/m ³		≤ 100µg/m ³		≤ 100µg/m ³	
VOC emission class (French regulation) - Indoor air quality	ISO 16000-9	A+		A+		A+	
Floorscore VOC test - Indoor air quality	ISO 16000-9	Passed		Passed		Passed	
Plasticizer	-	Phthalate-free		Phthalate-free		Phthalate-free	
Formaldehyde group	EN 717-1	E1		E1		E1	
Recyclability	-	100%		100%		100%	

WARRANTIES	STANDARD	SOLIDE CLICK 30 // SOLIDE CLICK 30 HB		ECO 30 // ECO 30 HB		ECOCLICK 30	
Residential warranty	-	25 years		25 years		25 years	
Commercial warranty	-	5 years		5 years		5 years	

CE MARKING	STANDARD	SOLIDE CLICK 30 // SOLIDE CLICK 30 HB		ECO 30 // ECO 30 HB		ECOCLICK 30	
DoP number	-	No. 17-6133-01		No. 00F-520		No. 00I-521	



ONE
FLOR

EUROPE

WITTESTRAAT 10 - 8501 HEULE - BELGIUM

+32 56 41 06 04

INFO@ONEFLOR-EUROPE.COM



WWW.ONEFLOR-EUROPE.COM